


Reverse 2 and 3
for polarity inversion

4 : 1

+4 dBu
pro
INPUT

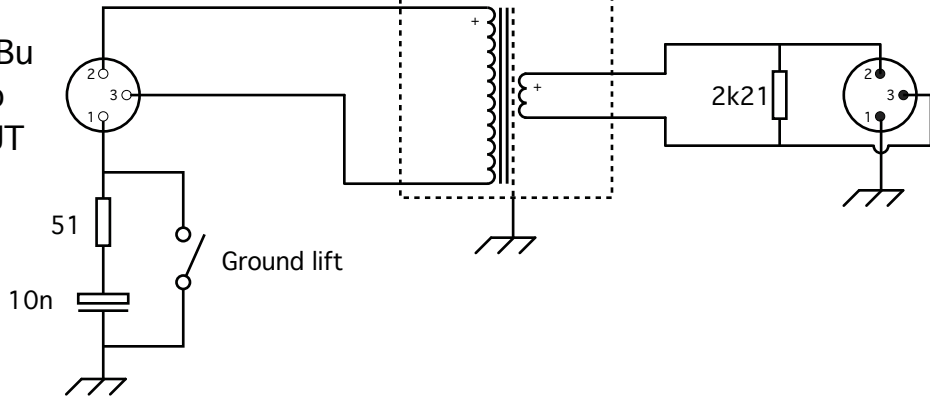

-10 dBV balanced
consumer level
OUTPUT

For input levels to +24 dBu at 20 Hz
input impedance 36k Ω bridging

For loads of
10k Ω or greater

Based on Jensen AS012 design